



PH834390

USA

I - II



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

3c869 U.S. PTO

09/630896



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**CERTIFIED COPY OF
PRIORITY DOCUMENT**


Signed

JEvens

Dated 29 March 2000



THIS PAGE BLANK (USPTO)

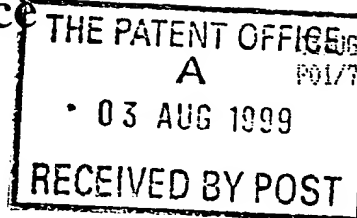

E466519-3 D02879
P01/7700 0.00 - 9918130.7

Request for grant of a patent
(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1.	Your reference	PHB 34369		
2.	Patent application number (The Patent Office will fill in this part)	9918130.7		03 AUG 1999
3.	Full name, address and postcode of the or of each applicant (<u>underline all surnames</u>)	KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS <i>7586605002</i>		
	Patents ADP Number (if you know it)			
	If the applicant is a corporate body, give the country/state of its incorporation	THE NETHERLANDS		
4.	Title of the invention	RADIO COMMUNICATION SYSTEM		
5.	Name of your agent (if you have one)	KEVIN JAMES SCOTT		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Philips Corporate Intellectual Property Cross Oak Lane Redhill Surrey RH1 5HA <i>7688914001</i>		
	Patents ADP number (if you know it)			
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority Application number	Date of filing
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description	9x2	/
Claims(s)	5x2	/
Abstract	1x2	/
Drawings	2x2	/

SK

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents
Statement of inventorship and right
to grant of a patent (*Patents Form 7/77*)
Request for preliminary examination and
search (*Patents Form 9/77*)
Request for substantive examination
(*Patents Form 10/77*)
Any other documents
(*Please specify*)

1

11. I/We request the grant of a patent on the basis of this application.

Signature

K J Scott

Date

2nd August 1999

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 81 5281

K J SCOTT

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION

RADIO COMMUNICATION SYSTEM

5 The present invention relates to a radio communication system having a random access packet channel for the transmission of data packets from a secondary station to a primary station, and further relates to primary and secondary stations for use in such a system and to a method of operating such a system. While the present specification describes a system with particular
10 reference to the emerging Universal Mobile Telecommunication System (UMTS), it is to be understood that the techniques described are equally applicable to use in other mobile radio systems. In this specification the term random access packet channel refers to the logical channel on which random access packet transmissions take place, which would typically consist of a
15 number of distinct physical channels.

A random access channel is a normal component of a radio communication system, enabling a Mobile Station (MS) to send short messages to a Base Station (BS). Applications include signalling to the BS
20 when the MS is turned on, sending a packet of data to the BS when the MS may not be engaged in a call, and requesting the BS to allocate a resource for the MS to use.

In a system where mobile stations often have a requirement to send packets of data to the BS when not actually engaged in a call it is
25 advantageous to provide a random access packet channel with similar characteristics to a standard random access channel but intended for the transmission of small and medium sized packets from a MS to the BS.

In an embodiment of a such a scheme developed for UMTS, there are a number of random access packet channels available to a MS. A request for
30 access to a packet channel sent by the MS is encoded with a randomly-chosen signature, which corresponds to one of the packet channels. If the channel is available for use, the BS allocates it to the requesting MS.

Because of the random choice of signature, it is possible that a MS is denied access to its selected packet channel even if there are other suitable channels available for use. This problem can lead to significant delays for a MS, as well as increased interference and loss of capacity.

5

An object of the present invention is to provide a random access packet channel having improved throughput and reduced transmission delays.

According to a first aspect of the present invention there is provided a radio communication system comprising a primary station and a plurality of secondary stations and having a random access packet channel for the transmission of data packets from a secondary station to the primary station, characterised in that the primary station has means for regularly transmitting a packet channel status message indicating the availability of packet channel resources and in that the secondary station has means for receiving the status message and means for using the contents of the message to determine what packet channel resources to request.

According to a second aspect of the present invention there is provided a primary station for use in a radio communication system having a random access packet channel for the transmission of data packets from a secondary station to the primary station, characterised in that means are provided for regularly transmitting a packet channel status message indicating the availability of packet channel resources.

According to a third aspect of the present invention there is provided a secondary station for use in a radio communication system having a random access packet channel for the transmission of data packets to a primary station, characterised in that means are provided for receiving a packet channel status message transmitted regularly by the primary station and for using the contents of the message to determine what packet channel resources to request.

According to a fourth aspect of the present invention there is provided a method of operating a radio communication system having a random access packet channel for the transmission of data packets from a secondary station

to a primary station, characterised by the primary station regularly transmitting a packet channel status message indicating the availability of packet channel resources and by the secondary station receiving the status message and using the contents of the message to determine what packet channel resources to request.

Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 is a block schematic diagram of a radio communication system;

Figure 2 illustrates a basic random access packet channel scheme;

Figure 3 illustrates an enhanced random access packet channel scheme having a packet channel availability message; and

Figure 4 is a flow chart illustrating a method in accordance with the present invention for broadcasting random access packet channel availability information.

In the drawings the same reference numerals have been used to indicate corresponding features.

Referring to Figure 1, a radio communication system comprises a primary station (BS) 100 and a plurality of secondary stations (MS) 110. The BS 100 comprises a microcontroller (μ C) 102, transceiver means (Tx/Rx) 104 connected to antenna means 106, power control means (PC) 107 for altering the transmitted power level, and connection means 108 for connection to the PSTN or other suitable network. Each MS 110 comprises a microcontroller (μ C) 112, transceiver means (Tx/Rx) 114 connected to antenna means 116, and power control means (PC) 118 for altering the transmitted power level. Communication from BS 100 to MS 110 takes place on a downlink channel 122, while communication from MS 110 to BS 100 takes place on an uplink channel 124.

A basic scheme for a random access packet channel operating in a frequency division duplex system is shown in Figure 2, with the uplink channel

124 drawn above the downlink channel 122. In an access phase, the MS 110 first transmits a preamble (P) 202, encoded with a signature randomly chosen from a set of 16 possible signatures, at a low power level in a particular access slot. A signature is a signal characterised by its scrambling code and channelisation code modulated by a specific bit sequence. A mutually
5 orthogonal set of signatures can be obtained by defining a set of mutually orthogonal bit sequences for the modulation. Hence, a different set of signatures can be obtained by changing the scrambling code or the channelisation code (i.e. the physical channel), or by using a different mutually
10 orthogonal set of bit sequences. Alternatively a larger set of signatures may be defined in such a way as to have low cross correlations, rather than strict orthogonality. Although the present specification refers to sets of 16 signatures different implementations may use sets having different numbers of signatures.

In this basic scheme the choice of preamble signature for encoding the
15 access preamble 202 determines the physical channel requested by the MS 110, with each preamble signature corresponding to a limited number of uplink and downlink channels. If the BS 100 receives and decodes the preamble correctly it transmits a preamble acknowledgement (A) 206. In the example shown in Figure 2, after the first preamble 202 is transmitted no
20 acknowledgement is returned in the slot 204 allocated for it (which might typically be 1ms in length). The MS 110 therefore transmits another preamble 202 at a higher power level. Again no acknowledgement is received in the slot 204, so the MS 110 transmits another preamble 202 at a still higher power. This is received and decoded by the BS 100, which transmits an
25 acknowledgement 206 and thereby completes the access phase.

As well as informing the MS 110 that its preamble 202 has been received, the acknowledgement 206 may be positive, to signal that the requested channels are free, or negative, to signal that they are in use and access is denied to the MS 110. A negative acknowledgement (NACK) may be
30 indicated by the BS 100 inverting the phase of the signature (with respect to some reference or pilot signal). Alternatively, some of the signatures used by the BS 100 for acknowledgement may also be used as a NACK.

The BS 100 will only transmit one acknowledgement for each access slot, however many preambles 202 were transmitted. One basis for the selection could be to acknowledge the preamble 202 received with the highest power. The initial power level at which a MS 110 transmits the preamble 202 is typically determined by the MS 110 using open loop power control, so that a MS 110 is not at a disadvantage compared to another MS 110 nearer to the BS 100. If more than one preamble 202 was transmitted but each preamble was encoded with a different signature then each MS 110 will know whether or not its preamble 202 was received correctly. However, it is possible that more than one MS 110 selected the same signature, and therefore believes that its preamble 202 has been received. If each of these mobile stations 110 begins to transmit its data the result will be a collision, with none of the data likely to be received correctly.

To reduce the chances of this happening, a contention resolution phase follows the transmission of an acknowledgement 206 which indicated that the requested channels were free. Each MS 110 which transmitted a preamble 202 encoded with a signature corresponding to that acknowledged by the BS 100 now transmits a further contention resolution preamble (CP) 208. This preamble 208 is encoded with a signature randomly selected from another set of 16 possible signatures. This set may be different from the set used for the access preamble 202 (either by changing the set of modulating bit sequences, the scrambling code or the channelisation code), or alternatively the set of signatures may be shared between access and contention resolution phases. The BS 100 then issues a contention resolution acknowledgement (CA) 210 corresponding to the selected preamble 208, for example that received with the highest power, which acknowledgement 210 enables the MS 110 to transmit its data. Hence, if more than one MS 110 selected the same access preamble 202 the chance of the same contention resolution preamble 208 also being selected is small.

After this contention resolution phase the BS 100 begins transmission of a Physical Control CHannel (PCCH) 212, which includes power control information to instruct the MS 110 to adjust its transmission power as

necessary, and the MS 110 transmits one or more data packets (PKT) 214 on the allocated packet channel, which is normally on a different physical channel to those used for the preamble transmissions. The PCCH 212 may begin simultaneously with the transmission of the data 214, or may precede it sufficiently for closed loop power control to be established before the data transmission.

A particular problem with the basic scheme described above is that a MS 110 may be denied access to a packet channel corresponding to its selected preamble signature, even though other suitable channels may be available. This makes it likely that a MS 110 will spend significant time waiting for a channel to become available, particularly when traffic loading is high.

It is therefore beneficial if a MS 110 can determine what packet channel resources are available (if any) before attempting to send a packet, and also to help in selecting an appropriate preamble signature. One known way in which this can be done is for the MS 110 to monitor system activity, for example by listening for access preambles 202 and acknowledgements 206, for an extended period before packet transmission. However, this leads to significant transmission delays for the MS 110, and the information may not be completely reliable (since the MS 110 may not be able to receive all the preambles 202 and acknowledgements 206 transmitted in a cell).

An improved system, in accordance with the present invention, is shown in Figure 3 in which the BS 100 repeatedly broadcasts a packet channel availability (AV) message 302, which informs a MS 110 about the resources currently available. Broadcasting the AV message 302 once per frame is a reasonable compromise between downlink overhead and delay, since the overall transmission delay will be dominated by the time taken to transmit the data packets 214, typically a few frames. If necessary, the AV message 302 could probably be broadcast less often without major impact. A system supporting up to 16 packet channels would require 16 bits of status information per AV message 302 to indicate the availability of each channel individually.

By preventing the MS 110 from attempting to transmit unless it has an indication that a suitable resource is available, interference is minimised and

the MS 110 saves power. These modifications will increase the overall throughput of the packet channel under high load conditions.

5 A further improvement is possible in a system in which channel assignment is carried out at the end of contention resolution. Such a system is disclosed in our co-pending patent application (our reference PHB 34368). In such a system it is only necessary to indicate whether a particular bit rate is available. For example, if there are six available bit rates (such as 60, 120, 240, 480, 960 and 1920kbps), six bits are needed to indicate the availability of each.

10 This can be reduced still further by adding a bit rate of 0 to the set and only broadcasting the maximum available bit rate (with a bit rate of 0 indicating that no resources are available). Then, assuming that any bit rate below the maximum available can be supported, only three bits are required.

15 A particularly convenient location for this message in a UMTS embodiment is as part of a paging indicator channel (PICH), which channel is used to inform a MS 110 that there is a message waiting for it. The channel has the capacity to transmit 300 bits per 10ms frame, but only 288 are required for paging indication messages. The remaining 12 bits per frame could be used to transmit an AV message 302. Alternatively, the AV message 302 could
20 be transmitted as paging messages, or in another physical channel having the same channelisation code as the PICH but only occupying the space left by the unused bits in the PICH, or as part of any other channel having similar characteristics.

If the AV message 302 is transmitted as part of a PICH it is useful to
25 allow a power offset between the page indication bits and the AV bits. This could allow for different quality of service requirements for the two types of information, as well as the possibility that each has different degrees of repetition coding applied. If a 3 bit AV message 302 is sent in the unused bits of a PICH, 4 times repetition coding could be applied. If a format of AV
30 message 302 requiring more than 12 bits is selected then the message could be split, for example over two frames.

A flow chart summarising a method in accordance with the present invention for a BS 100 broadcasting an AV message 302 is shown in Figure 4. The method starts, at step 402, when the BS 100 activates a random access packet channel. At step 404 the BS 100 determines which of the potentially available packet channels are not in use. From this information the BS 100 determines, at step 406, the highest bit rate available to a MS 110 having data for transmission on the random access packet channel. The BS 100 then uses this information to construct an AV message 302, which it transmits at step 410. Steps 404 to 410 are then repeated, typically once per frame.

A particular advantage of a method in accordance with the present invention is that the BS 100 has the flexibility to assign bit rates to channels only when they are requested, rather than pre-assigning bit rates to channels in the hope that the assignment will meet traffic requirements. The BS 100 may limit the bit rate indicated in an AV message 302, even if capacity is currently available, if such capacity may be required for other purposes.

As well as its application in a FDD system as described above, the present invention could be applied in other types of communication system. For example, it could be used in a Time Division Multiple Access (TDMA) system provided that the uplink transmissions take place in different time slots to the downlink transmissions.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of radio communication systems and component parts thereof, and which may be used instead of or in addition to features already described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present application also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that

new claims may be formulated to such features and/or combinations of features during the prosecution of the present application or of any further application derived therefrom.

5 In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. Further, the word "comprising" does not exclude the presence of other elements or steps than those listed.

CLAIMS

1. A radio communication system comprising a primary station and a plurality of secondary stations and having a random access packet channel for the transmission of data packets from a secondary station to the primary station, characterised in that the primary station has means for regularly transmitting a packet channel status message indicating the availability of packet channel resources and in that the secondary station has means for receiving the status message and means for using the contents of the message to determine what packet channel resources to request.

2. A system as claimed in claim 1, characterised in that the packet channel status message indicates which packet channels are available.

3. A system as claimed in claim 1, characterised in that the packet channel status message indicates which data rates are available on the packet channel.

4. A system as claimed in claim 1, characterised in that the packet channel status message indicates the highest data rate available on the packet channel.

5. A system as claimed in claim any one of claims 2 to 4, characterised in that the primary station has means for transmitting the packet channel status message during unused bits in a paging indicator channel, using the same channelisation code as that channel.

6. A system as claimed in claim 5, characterised in that the primary station has means for generating the packet channel status message as a 3 bit word.

7. A system as claimed in claim 6, characterised in that the primary station has means for encoding the packet channel status message using 4 times repetition coding.

5 8. A system as claimed in any one of claims 1 to 7, characterised in that the primary station has means for dynamically allocating bit rates to packet channels in response to requests for resources from secondary stations.

10 9. A primary station for use in a radio communication system having a random access packet channel for the transmission of data packets from a secondary station to the primary station, characterised in that means are provided for regularly transmitting a packet channel status message indicating the availability of packet channel resources.

15 10. A primary station as claimed in claim 9, characterised in that the packet channel status message indicates which packet channels are available.

20 11. A primary station as claimed in claim 9, characterised in that the packet channel status message indicates which data rates are available on the packet channel.

25 12. A primary station as claimed in claim 9, characterised in that the packet channel status message indicates the highest data rate available on the packet channel.

30 13. A primary station as claimed in any one of claims 10 to 12, characterised in that means are provided for transmitting the packet channel status message during unused bits in a paging indicator channel, using the same channelisation code as that channel.

14. A primary station as claimed in claim 13, characterised in that means are provided for generating the packet channel status message as a 3 bit word.

15. A primary station as claimed in claim 14, characterised in that means are provided for encoding the packet channel status message using 4 times repetition coding.

16. A primary station as claimed in any one of claims 9 to 15, characterised in that means are provided for dynamically allocating bit rates to packet channels in response to requests for resources from secondary stations.

17. A secondary station for use in a radio communication system having a random access packet channel for the transmission of data packets to a primary station, characterised in that means are provided for receiving a packet channel status message transmitted regularly by the primary station and for using the contents of the message to determine what packet channel resources to request.

18. A method of operating a radio communication system having a random access packet channel for the transmission of data packets from a secondary station to a primary station, characterised by the primary station regularly transmitting a packet channel status message indicating the availability of packet channel resources and by the secondary station receiving the status message and using the contents of the message to determine what packet channel resources to request.

19. A method as claimed in claim 18, characterised by the packet channel status message indicating the highest data rate available on the packet channel.

20. A method as claimed in claim 18, characterised by the packet channel status message indicating which data rates are available on the packet channel.

5 21. A method as claimed in claim 18, characterised by the packet channel status message indicating the highest data rate available on the packet channel.

22. A method as claimed in any one of claims 19 to 21, characterised
10 by transmitting the packet channel status message during unused bits in a paging indicator channel, using the same channelisation code as that channel.

23. A method as claimed in claim 22, characterised by generating the packet channel status message as a 3 bit word.

15 24. A method as claimed in claim 23, characterised by encoding the packet channel status message using 4 times repetition coding.

25. A method as claimed in any one of claims 18 to 24, characterised
20 by the primary station dynamically allocating bit rates to packet channels in response to requests for resources from secondary stations.

26. A radio communication system constructed and arranged to
operate substantially as hereinbefore described with reference to and as
25 shown in the accompanying drawings.

27. A primary station constructed and arranged to operate
substantially as hereinbefore described with reference to and as shown in the
accompanying drawings.

28. A secondary station constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

5 29. A method of operating a radio communication system substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

ABSTRACT

RADIO COMMUNICATION SYSTEM

5

A radio communication system has a random access packet channel for the transmission of data packets (214) from a secondary station to a primary station. Such a channel is intended for use by secondary stations having packets of data (214) to transmit to a primary station while not actually engaged in a call.

10

A problem with known systems of this type is that a secondary station requesting access also specifies which of a plurality of channels it wishes to access. If that channel is busy access is denied, even if other suitable channels are available. In the present system the primary station transmits a packet channel availability (AV) message (302) once per frame to inform secondary stations about the resources currently available. Hence a secondary station can select a channel known to be free. If no channels are available the secondary station can avoid a wasted access attempt.

15

20

(Figure 3)

THIS PAGE BLANK (USPTO)

1/2

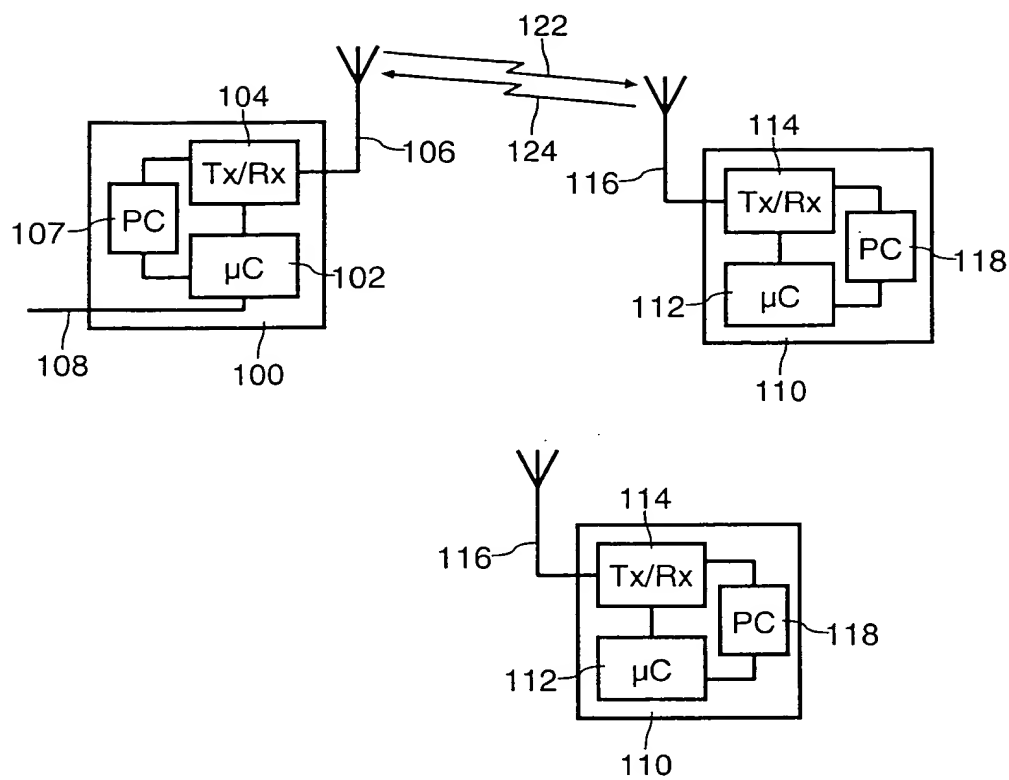


FIG. 1

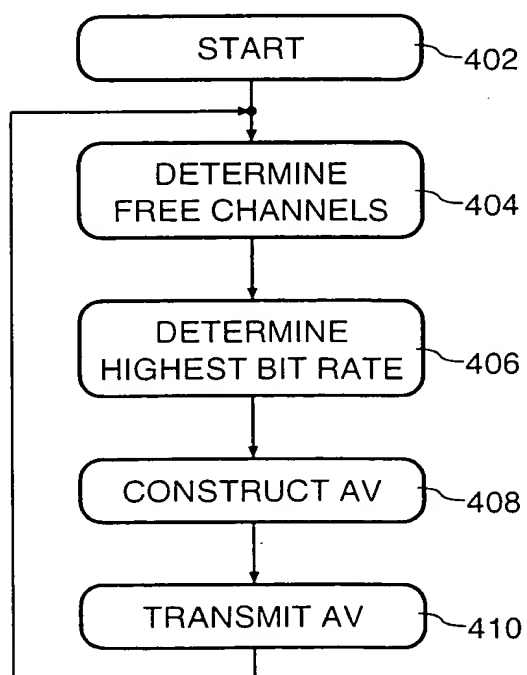


FIG. 4

THIS PAGE BLANK (USPTO)

2/2

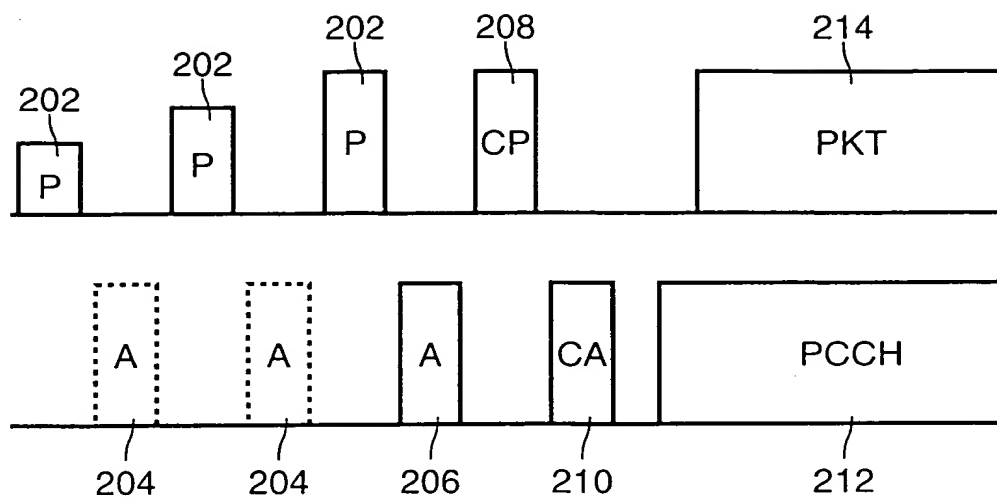


FIG. 2

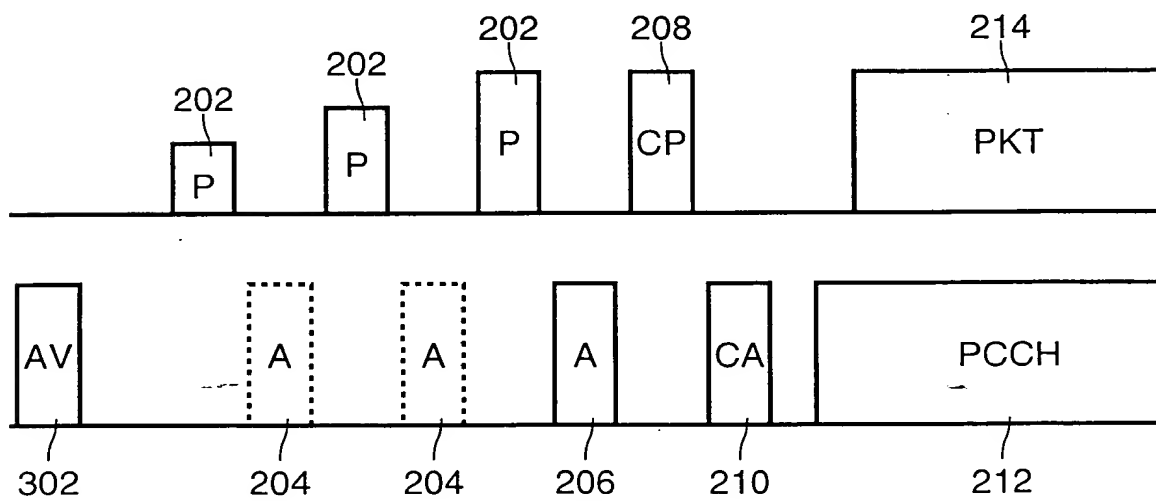


FIG. 3

THIS PAGE BLANK (USPTO)